




IPC-HFW3441T-ZAS-S2

Tubular IP H265 4M DN WDR Starlight IVS SMD IR60m 2.7-13.5VFM
IP67 PoE SD AUDIO MIC E/S AI

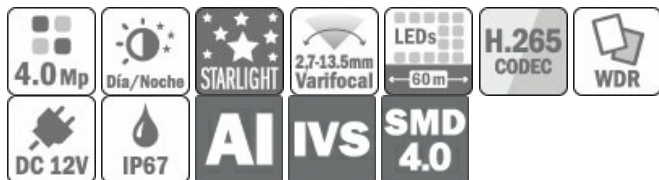

Características

- Resolución hasta 4MP@25IPS.
- Óptica motorizada 2.7-13.5mm (104°-29°x54°-16°x125°-33° (HxVxD)). F1.5.
- 1E/1S Alarma, 1E/1S Audio, Micro integrado.
- Compatible con: ONVIF (Profile S/Profile G/Profile T); CGI; P2P; Milestone; Genetec.
- Software de gestión: Smart PSS, DSS, DMSS.
- Alimentación 12Vdc (2.8W) y PoE (3.6W). Tecnología Starlight.
- Dimensiones y peso: 244.1x79x75.9mm / 0.82Kg.

*WizSense Series: Perimeter Protection, Smart Search, SMD 4.0, AI SSA, Quick Pick.

Productos Alternativos

[IPC-HFW2231T-ZAS-S2](#)

Accesorios

[PFA130-E](#)

[PFA135](#)



IPC-HFW3441T-ZAS-S2

Tubular IP H265 4M DN WDR Starlight IVS SMD IR60m 2.7-13.5VFM IP67 PoE SD AUDIO MIC E/S AI

Especificaciones de Producto

SENSOR	1/3" CMOS 4MP
MAX. RESOLUCIÓN / IPS	4MP@25IPS
CONMUTACIÓN	Día - Noche con Filtro ICR
MIN. ILUMINACIÓN	0.005Lux@F1.5
ÓPTICA	Varifocal Motorizada 2.7-13.5mm
LEDs IR	LEDs IR (Hasta 60m)
COMPRESIÓN (VÍDEO/AUDIO)	H.265/H.264/H.264B/H.264H/MJPEG (Sub Stream) y G.711a/G.711Mu/G.726/G.723
FUNCIONES DE CÁMARA	WDR(120dB), 3DNR, HLC, BLC
STREAM DE VÍDEO	Main 4MP@25IPS / 2nd D1 / 3rd 720@25IPS
INTERFAZ AUXILIAR	Micro SD (jusqu'à 256 Go)
ALIMENTACIÓN / CONSUMO	12Vdc et PoE
TEMPERATURA	De -30°C a +60°C (95% HR)
PROTECCIÓN	IP67
AI	WizSense Series
IVS Analytics	Tripwire et Intrusion.
SOPORTA SMD	SMD 4.0

<https://www.ibdglobal.com/shop/product/ipc-hfw3441t-zas-s2-tubular-ip-h265-4m-dn-wdr-starlight-ivs-smd-ir60m-2-7-13-5vfm-ip67-poe-sd-audio-mic-e-s-ai-17440>